


# HEAVY DUTY PLUS SUSPENSION RANGE

WARRANTY SUBJECT TO APPROVAL 2 YEARS ON NON WEAR PARTS AND 12 MONTHS ON WEAR PARTS

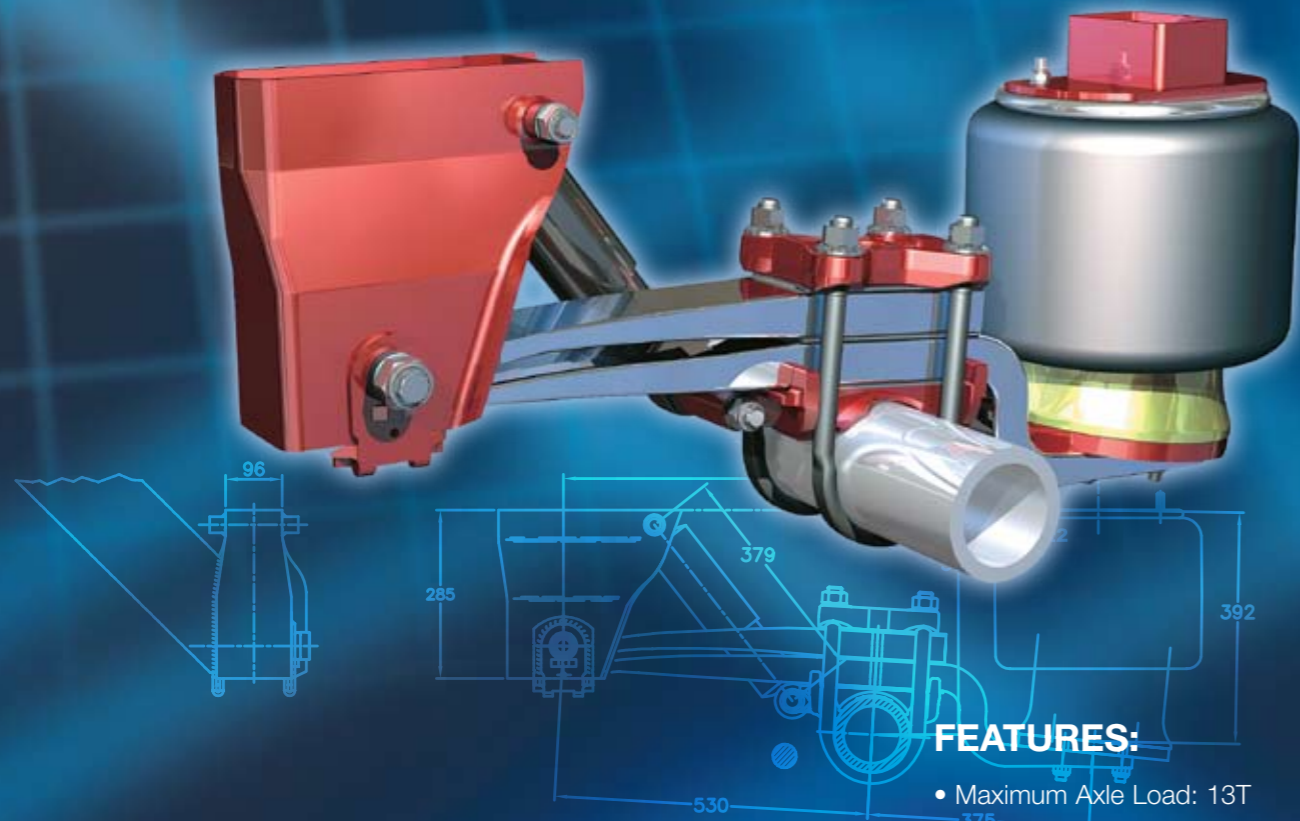

## FEATURES:

- Maximum Axle Load: 13T
- Double leaf trailing arm  
1st: 100x45mm  
2nd: 100x45mm
- Available ride heights:  
Underslung systems: 210-330  
Overslung systems: 390-570

## SPECIFICATIONS:

Ride height range: 210-285 mm

- Trailing arm: CF (530/380)
- Air bellow: E1ST2 (ø 350 mm.)
- Offset options: 30-50-95 mm

Ride height range: 230-330 mm

- Trailing arm: CD (530/325)
- Air bellow: E1ST2 (ø 350 mm.)
- Offset options: 30-50-95 mm.

Ride height range: 230-330 mm

- Trailing arm: CJ (530/380)
- Air bellow: E1ST2 (ø 350 mm.)
- Offset options: 30-50-95 mm.

Ride height range: 375-475 mm

- Trailing arm: CE (530/380)
- Air bellow: E1ST2 (ø 350 mm.)
- Offset options: 30-50-95 mm.

Ride height range: 445-520 mm

- Trailing arm: CG (530/380)
- Air bellow: E1ST2 (ø350 mm.)
- Offset options: 30-50-95 mm.

Ride height range: 470-570 mm

- Trailing arm: CO (530/325)
- Air bellow: E1ST2 (ø350 mm.)
- Offset options: 30-50-95 mm.

Ride height range: 490-565 mm

- Trailing arm: CR (530/380)
- Air bellow: E1ST2 (ø 350 mm.)
- Offset options: 30-50-95 mm.

**Weweler.**  
*Leadership in suspension technology*

**HEAVY DUTY PLUS SUSPENSION RANGE** has a 13 tonne rating and has been developed to suit extreme duty applications where air suspension is preferred over mechanical spring when used in conjunction with Fuwa's range of heavy duty axles.

