

LANDING GEAR LEGS: KH25000




3 YEAR WARRANTY




A ROCKER




G SELF LEVEL



R WHEELS



S COMPENSATING



T SKID

SPECIFICATIONS:

STROKE CAPACITY

28,000kg/pair

STATIC LOAD CAPACITY

80,000kg/pair

WEIGHT

102kg (with skid foot)

MOUNTING PLATE

5 holes x 57mm x 190mm (din)

STROKE

480mm; 430mm

CRANK FORCE

35kg

GEAR RATIO:

LOW GEAR

0.71mm per turn of handle

HIGH GEAR


5.4mm per turn of handle

FEATURES:

- Wider square sections of 130mm with 'double' tubings
- Wider full mounting plate of continental or universal version
- 480mm or 430mm lift
- Bigger sand shoe
- Gear box with low temperature premium chassis grease, rated for service from -30°C to +120°C
- Low maintenance feature with grease packed jaw screw
- Lower crank force
- Meets TTMA, AAR and German safety regulations for commercial vehicles

K Hitch legs: Lift up with the best

The **KH25000** series low maintenance semi-trailer landing gear. K Hitch Landing Gear Legs are the smoothest on the Australian market. The gears are drop forged from quality steel, hardened and machined to extend service life and provide easy winding and lifting. The main lift screw is encased, grease filled and sealed in a tube to ensure maintenance free operation.

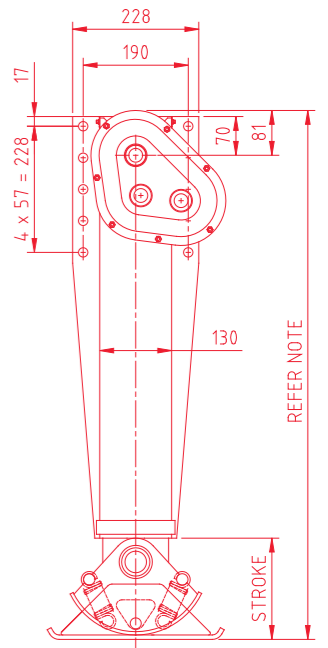

NOTE: Length of leg varies and is dependent upon foot type and stroke.

STANDARD MODEL

PART NO.	STROKE
KH250001	430mm
KH250002	480mm

PART NO.	FOOT TYPE	STROKE
KH250001/A	Rocker	430
KH250001/G	Self Level	430
KH250001/T	Skid	430
KH250001/S	Compensating	430
KH250002/A	Rocker	480
KH250002/G	Self Level	480
KH250002/T	Skid	480
KH250002/S	Compensating	480

A Universal bolt pattern, two stroke lengths and five optional foot groups, allows for complete interchangeability with most other makes.

Manufactured to ISO 9002 certification and designed to exceed the test conditions developed by the Association of American Railroad Engineers. This and other standard features provide greater strength and reliability.