



www.khitch.com.au

AXLE and SUSPENSION ORDER FORM

Customer		Order No		Date of Order	
Customer Contact				Date required	
Phone		Quote No			
Fax		Job No		Date Hangers required	
E-mail		Chassis No			
Delivery Address				QTY required	

Trailer Configuration: (please circle the type of application)	SINGLE	TANDEM	3 AXLE DOG	B-DOUBLE A	TIP OVER AXLE	OTHER:
	TRI	QUAD	4 AXLE DOG	B-DOUBLE B	ROAD TRAIN	DOLLY

AXLE ORDER

1 AXLE MODEL

- KF2 - 11.5T 22.5 DUAL WHEEL
- KF3 - 11.5T 19.5 DUAL WHEEL
- KK4 - 11.5T 15" OR 17.5 DUAL

2 BRAKE TYPE

- 1 - 420 x 180 "S" XEM (FRUEHAUF)
- 2 - 420 x 180 "S" Q (STANDARD)
- 7 - 380 x 220mm (19.5")
- 4 - 311 x 180mm (15, 17.5")
- 6 - DISC (WABCO PAN19)

3 BEARING COMBINATION

- A - TN HM218210/48
- B - TP HM518410/45
- U - UNITISED BEARING

4 LUBRICATION

- F - OIL
- G - GREASE

5 HUB TYPE

- 10 - BEAM ONLY
- 11 - BEAM & BRACKETS
- 12 - BEAM & CAM
- 13 - BEAM & BRAKE
- 14 - 5 SPOKE(20") OR 3 SPOKE(15")
- 15 - 10 x M22 x 285 (20") OR x 225 (17.5")
- 16 - 10 x M22 x 335 ISO STEEL
- 17 - 10 x M22 x 285 DURALITE HUBS
- 18 - OTHER OPTIONS IF AVAILABLE P.O.A
- 19 - 8 x M22 x 275 ISO STEEL
- 20 - 8 x M22 x 275 ISO ALUM
- 21 - 10 x M22 x 225 ISO STEEL

6 STUD TYPE

- J - 3/4" UNC WITH RIM CLAMP
- K - SHORT, STEEL WHEELS
- L - LONG, ALUMINIUM WHEELS

7 TRACK

- 1820mm
- 1850mm

8 AXLE BEAM

- N - ROUND 127 x 16mm
- P - ROUND 127 x 19mm

9 CAM TYPE


- 30 - LONG INC. CAM TUBES
- 32 - LONG 15 & 19.5 NO TUBES

10 OPTIONS

- X - ABS REQUIRED
- V - CENTRIFUGE DRUMS
- W - AUTO SLACK ADJ.
- Y - HUBO // SIZE : _____
- Z - LIGHTWEIGHT HUBS

11 CAMBER

- S - STRAIGHT **
- C - CAMBERED *

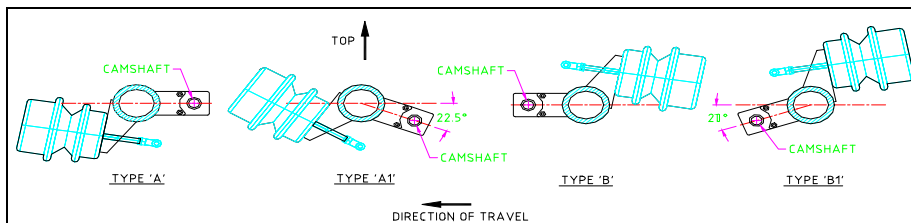

12 BOOSTER LOCATION*

- TYPE 'A'
- TYPE 'A1'
- TYPE 'B'
- TYPE 'B1'

*** FOR CAMBERED AXLES ONLY**

** Booster location for STRAIGHT Axles is to a default setting or by consultation with FKH engineering.

NOTE: DISC BRAKES

IF YOU REQUIRE DISC BRAKE ACTUATORS SUPPLIED BY KHITCH PLEASE NOMINATE SIZE
 FOR DISC BRAKE ACTUATOR LOCATION PLEASE SUPPLY APPROVED DRAWING WITH THE ORDER
 MINIMUM RH FOR DISC BRAKE APPLICATION IS 305mm (please check with FKH engineering if you require less)

ACTUATOR SIZE:

NOTE: ABS SUPPLIED AND FITTED REQUIREMENTS

AXLE SENSED QUANTITY:

TYRE SIZE:

AXLE ASSEMBLY PART NUMBER

INSERT THE NUMBER/CODE SELECTED AT THE TOP, TO CREATE THE AXLE ASSEMBLY PART NUMBER

MODEL	BRAKE TYPE	BEARING	LUBRICATION	HUB	STUD LENGTH	TRACK	BEAM	CAMSHAFT	OPTIONS	CAMBER	BOOSTER
1	2	3	4	5	6	7	8	9	10	11	12
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

For Suspension Orders PTO

SUSPENSION ORDER

Please select what type of suspension you would like to order:

- MF Mechanical Spring Suspension - FKH
 AW Air Spring Suspension - Weweler
 AWC Air Spring Suspension - W&C

DO YOU REQUIRE KHITCH TO WELD YES
TRAILING ARMS TO AXLES NO

- 930MM HANGER CTRS 960MM HANGER CTRS 980MM HANGER CTRS (Weweler only) OTHER PLEASE CONTACT FKH

Mechanical Spring Suspension - FKH

1 CAST SUSP MODEL

- KHDO - CAST OVERSLUNG
 KHU - CAST UNDERSLUNG

2 NUMBER OF AXLES

- 4 - Quad
 3 - Tri
 2 - Tandem
 1 - Single

3 AXLE SPREAD

- A - Single Axle
 B - 1232mm - 8.1'
 C - 1384mm - 9.1'
 D - 1538mm - 10.1'

4 NUMBER OF LEAF

- 3 - 3 Leaf Spring
 8 - 8 Leaf Spring
 9 - 9 Leaf Spring

1 FAB SUSP MODEL

- KF68 - FABRICATED 11.5T
 KF86 - FABRICATED 13T
 KF88 - FABRICATED 17T

5 TYPE

- O - FAB OVERSLUNG
 U - FAB UNDERSLUNG

Note: Low axle seat supplied as standard, suit 127mm round axle
 For Draw-Bar Hanger add D/B after the regular part number
 For different Axle Seats add a:

- 2 2" Seat Add 25mm to std. RH
 3 3" Seat Add 50mm to std. RH

INSERT THE NUMBER/CODE SELECTED AT THE TOP, TO CREATE THE SUSPENSION ASSEMBLY PART NUMBER

1	2	3	4	5					

Air Spring Suspension - Weweler

1 SYSTEM

- U - Ultra Lite 9 Tonne Mono Leaf
 E - Euro 9 Tonne Twin Leaf
 H - Heavy Duty 11 Tonne
 H+ - Heavy Duty 13 Tonne

2 HANGER TYPE

- AW - Fixed Hanger c/w welded Bracing
 A - Fixed Hanger
 CB - Adjustable Hanger c/w Bracing

3 TRAILING ARM

- HG - UL 230mm RH Mono Leaf 48mm
 HE - UL 375mm RH Mono Leaf 48mm
 DG - Euro 230mm RH Twin Leaf 35mm
 DE - Euro 375,425mm RH Twin Leaf 35mm
 BJ - HD 11 ton 240mm RH Twin Leaf 35 & 45mm
 GE - HD 11 ton 440mm RH Twin Leaf 35 & 45mm
 CE - HD 13 ton 390mm RH Twin Leaf 45 & 45mm

4 CLAMP GROUP

- 5 - Std. For 127mm round axle.
 (Call FKH for other options)

5 AIR SPRING

- 30 - UL & Euro 300mm 9 ton
 36 - HD 350mm 11 & 13 ton

6 RIDE HEIGHT

- 230 - 230mm UL & Euro under slung
 375 - 375mm UL & Euro over slung
 425 - 425mm UL & Euro over slung
 240 - 240mm HD under slung
 440 - 440mm HD over slung
 390 - 390mm HD+ over slung

7 OFF SET

- 65 - 65mm off STD. for UL
 50 - 50mm off STD. for Euro
 95 - 95mm off STD. for HD
 30 - 30mm off STD. for HD
 56 - 56mm off STD. for HD
 95 - 95mm off STD. for HD+

INSERT THE NUMBER/CODE SELECTED AT THE TOP, TO CREATE THE SUSPENSION ASSEMBLY PART NUMBER

1	2	3	4	5	6	7

Air Spring Suspension - W&C

- TA250T-15CEF 380 MM RIDE HEIGHT
 TA250T-17CEF 430 MM RIDE HEIGHT
 TA250U 12CEF 305 MM RIDE HEIGHT
 TA250U - 9CEF 228MM RIDE HEIGHT
 TA250U - 7.5 190MM RIDE HEIGHT
 TA250U - 6.5 165MM RIDE HEIGHT

OTHER RIDE HEIGHT REQUIRED
 CONTACT KHITCH FOR OPTIONS

- OPTIONAL KITS**
 KHWCL/LA AXLE LIFT
 KHAS-R/L RAISE LOWER
 KHASDUMP DUMP KIT
 KHAS-02DR AIR GUAGE

Air Kits for Air Suspensions

(For Weweler Suspension add a **W** in front of the part number below)

overslung

- ACK1O SINGLE NO TANK STD
 ACK1OT SINGLE C/W TANK
 ACK2O TANDEM STD
 ACK2OT TANDEM C/W TANK
 ACK3O TRI NO STD
 ACK3OT TRI C/W TANK

underslung

- ACK1U SINGLE NO TANK STD
 ACK1UT SINGLE C/W TANK
 ACK2U TANDEM STD
 ACK2UT TANDEM C/W TANK
 ACK3U TRI NO STD
 ACK3UT TRI C/W TANK

- ACK2AD 2 AXLE DOG STD
 ACK2AD 2 AXLE DOG C/W TANK
 ACK3AD 3 AXLE DOG STD
 ACK3ADT 3 AXLE DOG C/W TANK
 ACK4AD 4 AXLE DOG NO TANK
 ACK4ADT 4 AXLE DOG C/W TANK
 OTHER PLEASE SPECIFY

Brake Kits

- SINGLE AXLE TAG
 TANDEM LEAD
 TANDEM TAG
 TRI LEAD
 TRI TAG

- QUAD LEAD
 QUAD TAG
 TANDEM DOG
 TRI DOG
 QUAD DOG

- 30/30
 24/30
 24/24
 20/24
 OTHER: _____