


ULTRA LITE SUSPENSION RANGE

3 YEARS WARRANTY ON
NON WEAR PARTS SUCH
AS HANGERS, AXLE SEATS
AND TRAILING ARMS AND
2 YEARS ON WEAR PARTS
SUCH AS SHOCK ABSORBERS,
AIR SPRINGS, PIVOT
BUSHES

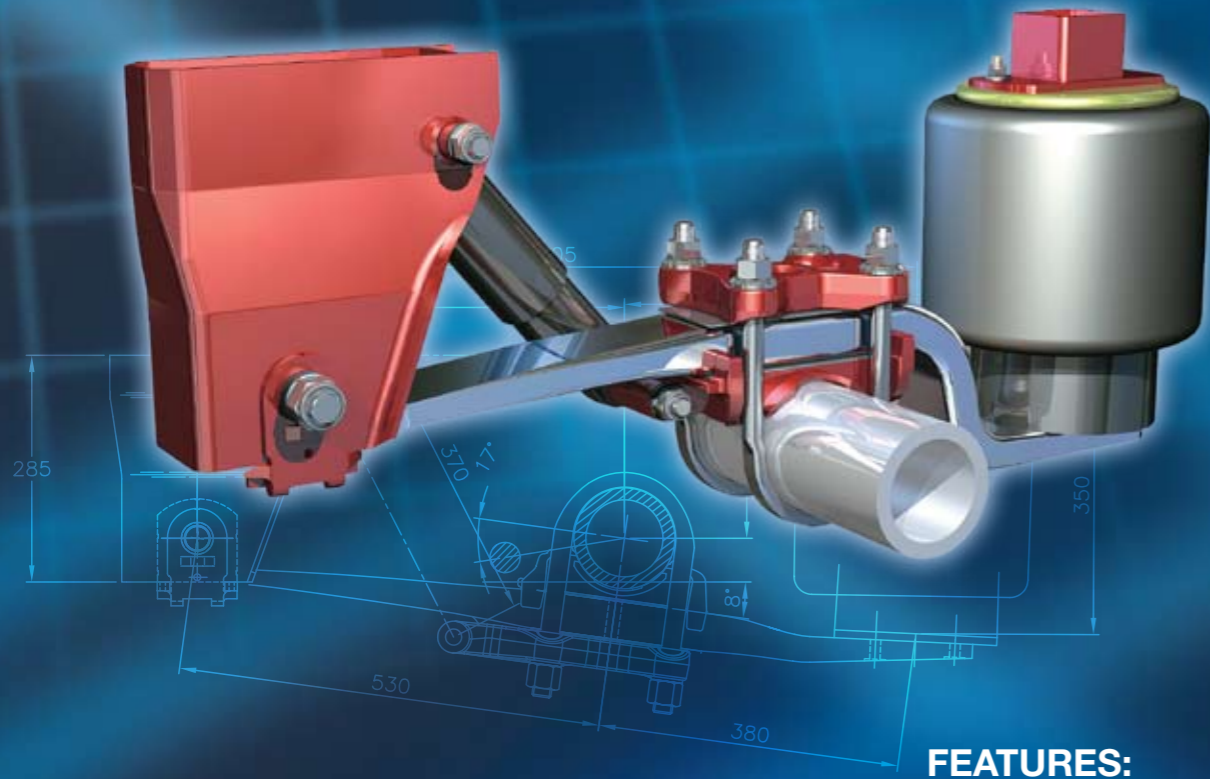

FEATURES:

- Maximum Axle Load: 9T
- Single leaf trailing arm: 100x48mm
- Available ride heights:
Underslung systems: 190-340
Overslung systems: 325-515

SPECIFICATIONS:

RIDE HEIGHT RANGE

- 190-215 mm
- Trailing arm: HI (530/380)
- Air bellow: EURO (ø 300 mm)
- Offset options: 0-30-50 mm

RIDE HEIGHT RANGE

- 240-340 mm
- Trailing arm: HG/HR (530/380)
- Air bellow: EURO (ø 300 mm)
- Offset options: 20-60 mm

RIDE HEIGHT RANGE

- 260-310 mm
- Trailing arm: HG/HR (530/380)
- Disc brake application
- Air bellow: EURO (ø 300 mm)
- Offset options: 20-65 mm

RIDE HEIGHT RANGE

- 325-400 mm
- Trailing arm: HS/HH (530/380)
- Air bellow: EURO (ø 300 mm)
- Offset options: 20-65 mm

RIDE HEIGHT RANGE

- 375-475 mm
- Trailing arm: HE/HD (530/380)
- Air bellow: EURO (ø 300 mm)
- Offset options: 20-65 mm

RIDE HEIGHT RANGE

- 465-515 mm
- Trailing arm: HN/HL (530/380)
- Air bellow: EURO (ø 300 mm)
- Offset options: 20-65 mm

Weweler.
*Leadership in
suspension technology*

The **ULTRA LITE SUSPENSION RANGE** has a 9 tonne rating and is developed to suit most types of on road general freight applications in either single or twin tyres.

WEWELER
IMPROVING TRANSPORTATION

