

# AXLE ORDER FORM

<b>CUSTOMER</b>	<b>DELIVERY ADDRESS</b>		
<b>CONTACT</b>	<b>PHONE</b>	<b>E-MAIL</b>	

<b>ORDER NO</b>	<b>ORDER DATE</b>	<b>DATE REQUIRED</b>	
<b>QTY REQUIRED</b>	<b>QUOTE NO</b>	<b>JOB / CHASSIS NO</b>	

1 AXLE MODEL	
<b>KF1</b>	9.0T 22.5 DUAL WHEEL
<b>KF2</b>	11.5T 22.5 DUAL WHEEL
<b>KF3</b>	11.5T 19.5 DUAL WHEEL
<b>KK2</b>	11.5T 22.5 DUAL WHEEL
<b>KK4</b>	10.5T 15"/17.5" DUAL
<b>KSS1</b>	10.0T SELF STEER**

4 LUBRICATION	
<b>F</b>	OIL / SEMIFLUID
<b>G</b>	GREASE

8 AXLE BEAM	
<b>A</b>	Ø 146 x 10mm MBS only
<b>N</b>	Ø 127 x 15mm
<b>P</b>	Ø 127 x 18mm
<b>U</b>	□ 127 x 127 x 10mm
<b>S</b>	□ 150 x 150 x 15mm
<b>S</b>	Ø 127 x 25mm Self Steer**
<b>T</b>	□ 150 x 150 x 18mm

2 BRAKE TYPE	
<b>1</b>	420x180 "S" XEM
<b>2</b>	420x180 "S" Q
<b>3</b>	PAN 22 DISC
<b>4</b>	311x180mm (15",17.5")
<b>6</b>	PAN 19 DISC
<b>7</b>	380x220mm (19.5")
<b>9</b>	420x180 HD P

5 HUB TYPE	
<b>14</b>	5 OR 3 SPOKE
<b>15</b>	10x285 OR 10x225 for KK44
<b>16</b>	10x335
<b>18</b>	10x285 ALU. (PRESET)
<b>19</b>	8x275

9 CAM TYPE	
<b>30</b>	LONG ENCLOSED
<b>32</b>	LONG OPEN (15"&19.5")
<b>33</b>	SHORT STEER AXLE only
<b>XX</b>	NO CAM (Disc brake)


3 BEARINGS	
<b>A</b>	TN (TAPERED SPINDLE)
<b>B</b>	TP (PARALLEL SPINDLE)
<b>U</b>	UNITISED (CARTRIDGE)
<b>CA</b>	ConMet PRESET TN
<b>CB</b>	ConMet PRESET TP

6 STUD TYPE	
<b>J</b>	¾" UNC
<b>K</b>	SHORT, STEEL WHEELS
<b>L</b>	LONG, ALUM WHEELS

10 OPTIONS	
<b>V</b>	CENTRIFUSE DRUMS
<b>W</b>	AUTO SLACK ADJUSTER
<b>X</b>	ABS REQUIRED
<b>Y</b>	HUBO/SIZE: _____
<b>Z</b>	TRUTURN DRUMS

7 TRACK	
<b>1820</b>	1820mm
<b>1850</b>	1850mm
<b>1956</b>	1956mm (KK44 only!)

11 CAMBER	
<b>S</b>	STRAIGHT**
<b>C</b>	CAMBERED*

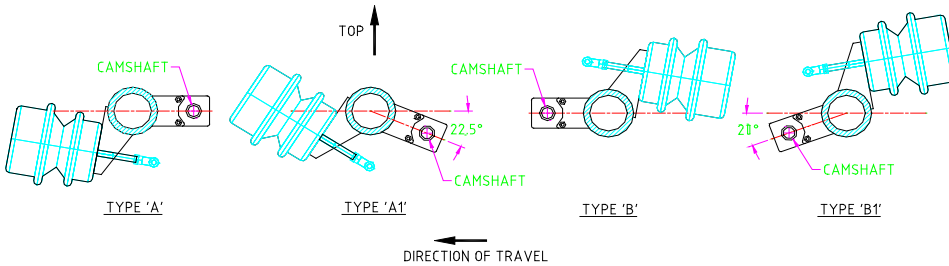

12 BOOSTER LOCATION* (For cambered axles only)	
<b>A</b>	TYPE A
<b>A1</b>	TYPE A1
<b>B</b>	TYPE B
<b>B1</b>	TYPE B1

\*\* Booster location for STRAIGHT axles is to a default setting or by consultation with FKH engineering.

Select the required code and create the assembly part number. (NOT all combinations are available!)											
AXLE MODEL	BRAKE TYPE	BEARING	LUBE	HUB TYPE	STUD TYPE	TRACK	AXLE BEAM	CAM TYPE	OPTIONS	CAMBER	BOOSTER LOCATION
1	2	3	4	5	6	7	8	9	10	11	12

<b>FOR DISC BRAKE AXLES</b>	If boosters are required nominate size:	
	For booster location supply drawing. Min .RH 305mm	

<b>ABS SUPPLIED &amp; FITTED REQUIREMENTS</b>	Axle sensed quantity:	
	Tyre size:	

QTY	BOOSTER	INSTALLATION
	<b>30/30</b>	5"
	<b>24/30</b>	6"
	<b>24/24</b>	7"
	<b>20/24</b>	OTHER: _____
	<b>OTHER</b>	_____