



www.khitch.com.au

AXLE and SUSPENSION ORDER FORM

Customer		Order No		Date of Order	
Customer Contact				Date required	
Phone		Quote No			
Fax		Job No		Date Hangers required	
E-mail		Chassis No			
Delivery Address				QTY required	

Trailer Configuration: (please circle the type of application)	SINGLE	TANDEM	3 AXLE DOG	B-DOUBLE A	TIP OVER AXLE	OTHER:
	TRI	QUAD	4 AXLE DOG	B-DOUBLE B	ROAD TRAIN	DOLLY

AXLE ORDER

1 AXLE MODEL

- KF1 - 9.0T 22.5 DUAL WHEEL
- KF2 - 11.5T 22.5 DUAL WHEEL
- KF3 - 11.5T 19.5 DUAL WHEEL
- KK2 - 11.5T 22.5 DUAL WHEEL
- KK4 - 11.5T 15" OR 17.5 DUAL
- KSS1 - STEER AXLE 10T

2 BRAKE TYPE

- 1 - 420 x 180 "S" XEM (FRUEHAUF)
- 2 - 420 x 180 "S" Q (STANDARD)
- 3 - PAN 22 DISC
- 4 - 311 x 180mm (15, 17.5")
- 6 - PAN 19 DISC
- 7 - 380 x 220mm (19.5")
- 9 - 420 x 180 HD P brake

3 BEARING COMBINATION

- A - TN HM218210/48
- B - TP HM518410/45
- U - UNITISED BEARING
- PA - PRESET TN
- PB - PRESET TP
- CA - CONMET PRESET TN
- CB - CONMET PRESET TP

4 LUBRICATION

- F - OIL / Semifluid
- G - GREASE

5 HUB TYPE

- 14 - 5 SPOKE(20") OR 3 SPOKE(15")
- 15 - 10 x 285 (20") OR x 225 (17.5")
- 16 - 10 x 335 ISO
- 17 - 10 x 285 DURALITE HUBS
- 18 - 10 x 285 ALU HUB (Preset)
- 19 - 8 x 275 ISO

Note: For BEAM&BRAKE only call FKH

6 STUD TYPE

- J - 3/4" UNC WITH RIM CLAMP
- K - SHORT, STEEL WHEELS
- L - LONG, ALUMINIUM WHEELS

7 TRACK

- 1820mm
- 1850mm

8 AXLE BEAM

- A - ROUND MBS 146 x 10mm
- N - ROUND 127 x 16mm
- P - ROUND 127 x 19mm
- U - SQUARE 127 x 127mm
- R - SQUARE 150X150X10mm
- S - SQUARE 150X150X15mm

9 CAM TYPE

- 30 - LONG INC. CAM TUBES
- 32 - LONG 15 & 19.5 NO TUBES
- 33 - SHORT STEER AXLE ONLY
- XX - NO CAM (for disc only)

10 OPTIONS

- V - CENTRIFUSE DRUMS
- W - AUTO SLACK ADJ.
- X - ABS REQUIRED
- Y - HUBO / SIZE : _____
- Z - TRUTURN DRUMS


11 CAMBER

- S - STRAIGHT **
- C - CAMBERED *

12 BOOSTER LOCATION*

- TYPE 'A'
- TYPE 'A1'
- TYPE 'B'
- TYPE 'B1'

*** FOR CAMBERED AXLES ONLY**

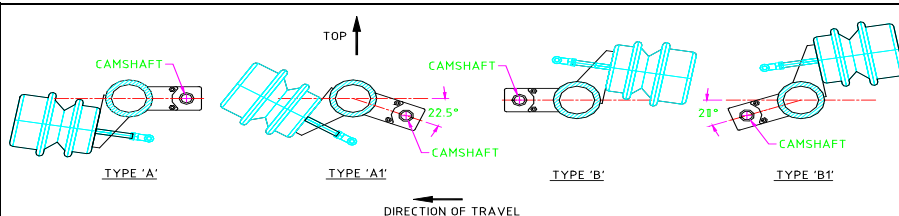

** Booster location for STRAIGHT Axles is to a default setting or by consultation with FKH engineering.

NOTE: DISC BRAKES

IF YOU REQUIRE DISC BRAKE ACTUATORS SUPPLIED BY KHITCH PLEASE NOMINATE SIZE
 FOR DISC BRAKE ACTUATOR LOCATION PLEASE SUPPLY APPROVED DRAWING WITH THE ORDER
 MINIMUM RH FOR DISC BRAKE APPLICATION IS 305mm (please check with FKH engineering if you require less)

ACTUATOR SIZE:

NOTE: ABS SUPPLIED AND FITTED REQUIREMENTS

AXLE SENSED QUANTITY:

TYRE SIZE:

AXLE ASSEMBLY PART NUMBER

INSERT THE NUMBER/CODE SELECTED AT THE TOP, TO CREATE THE AXLE ASSEMBLY PART NUMBER

MODEL	BRAKE TYPE	BEARING	LUBRICATION	HUB	STUD LENGTH	TRACK	BEAM	CAMSHAFT	OPTIONS	CAMBER	BOOSTER
1	2	3	4	5	6	7	8	9	10	11	12
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Note: Not every combination is available!

For Suspension Orders PTO

SUSPENSION ORDER

Please select what type of suspension you would like to order:

DO YOU REQUIRE KHITCH TO WELD <input type="checkbox"/> YES TRAILING ARMS TO AXLES <input type="checkbox"/> NO	<input type="checkbox"/> MF Mechanical Spring Suspension - FKH <input type="checkbox"/> AW Air Spring Suspension - Weweler <input type="checkbox"/> AKT Air Spring Suspension - FUWA KT
--	---

930MM HANGER CTRS
 960MM HANGER CTRS
 980MM HANGER CTRS (Weweler only)
 OTHER PLEASE CONTACT FKH

Mechanical Spring Suspension - FKH

1 CAST SUSP MODEL <input type="checkbox"/> KHDO - CAST OVERSLUNG <input type="checkbox"/> KHU - CAST UNDERSLUNG	2 NUMBER OF AXLES <input type="checkbox"/> 4 - Quad <input type="checkbox"/> 3 - Tri <input type="checkbox"/> 2 - Tandem <input type="checkbox"/> 1 - Single	3 AXLE SPREAD <input type="checkbox"/> A - Single Axle <input type="checkbox"/> B - 1232mm - 8.1' <input type="checkbox"/> C - 1384mm - 9.1' <input type="checkbox"/> D - 1538mm - 10.1'	4 NUMBER OF LEAF <input type="checkbox"/> 3 - 3 Leaf Spring <input type="checkbox"/> 8 - 8 Leaf Spring <input type="checkbox"/> 9 - 9 Leaf Spring
--	---	---	---

1 FAB SUSP MODEL

<input type="checkbox"/> KF68 - FABRICATED 11.5T <input type="checkbox"/> KF86 - FABRICATED 13T <input type="checkbox"/> KF88 - FABRICATED 17T	5 TYPE <input type="checkbox"/> O - FAB OVERSLUNG <input type="checkbox"/> U - FAB UNDERSLUNG
--	--

Note: Low axle seat supplied as standard, suit 127mm round axle
 For Draw-Bar Hanger add D/B after the regular part number
 For different Axle Seats add a:
 2 2" Seat Add 25mm to std. RH
 3 3" Seat Add 50mm to std. RH

INSERT THE NUMBER/CODE SELECTED AT THE TOP, TO CREATE THE SUSPENSION ASSEMBLY PART NUMBER

1	2	3	4	5					

Air Spring Suspension - Weweler

1 SYSTEM <input type="checkbox"/> U - Ultra Lite 9 Tonne Mono Leaf <input type="checkbox"/> E - Euro 9 Tonne Twin Leaf <input type="checkbox"/> H - Heavy Duty 11 Tonne <input type="checkbox"/> H+ - Heavy Duty 13 Tonne	2 HANGER TYPE <input type="checkbox"/> CW - Hanger	3 TRAILING ARM <input type="checkbox"/> HG - UL 230mm RH Mono Leaf 48mm <input type="checkbox"/> HE - UL 375mm RH Mono Leaf 48mm <input type="checkbox"/> DG - Euro 230mm RH Twin Leaf 35mm <input type="checkbox"/> DE - Euro 375,425mm RH Twin Leaf 35mm <input type="checkbox"/> BJ - HD 11 ton 240mm RH Twin Leaf 35 & 45mm <input type="checkbox"/> GE - HD 11 ton 390, 425, 440mm RH Twin Leaf 35 & 45mm <input type="checkbox"/> CE - HD 13 ton 390mm RH Twin Leaf 45 & 45mm <input type="checkbox"/> BG - HD 195mm
--	--	---

4 CLAMP GROUP
 5 - Std. For 127mm round axle. (Call FKH for other options)

5 AIR SPRING
 30 - UL & Euro 300mm 9 ton
 36 - HD 350mm 11 & 13 ton

6 RIDE HEIGHT (in mm)

<input type="checkbox"/> 195 - HD	US
<input type="checkbox"/> 230 - UL & Euro	US
<input type="checkbox"/> 240 - HD	US
<input type="checkbox"/> 375 - UL & Euro	OS
<input type="checkbox"/> 390 - HD & HD+	OS
<input type="checkbox"/> 425 - UL & Euro & HD	OS
<input type="checkbox"/> 440 - HD	OS

7 OFF SET (in mm)

<input type="checkbox"/> 50^ - STD. for Euro
<input type="checkbox"/> 56 - for 195RH HD only
<input type="checkbox"/> 65# - STD. for UL
<input type="checkbox"/> 95* - STD. for HD & HD+

^ configurable to 30mm
 # configurable to 20mm
 * configurable to 30&50mm

Note: For Rear Shocker Mount options contact FKH
 US - underslung OS - overslung

INSERT THE NUMBER/CODE SELECTED AT THE TOP, TO CREATE THE SUSPENSION ASSEMBLY PART NUMBER

1	2	3	4	5	6	7

Air Spring Suspension - FUWA KT

<input type="checkbox"/> KT250T 380 MM RIDE HEIGHT <input type="checkbox"/> KT250T 430 MM RIDE HEIGHT <input type="checkbox"/> KT250U 305 MM RIDE HEIGHT <input type="checkbox"/> KT250U 228MM RIDE HEIGHT <input type="checkbox"/> KT250U 190MM RIDE HEIGHT <input type="checkbox"/> KT250U 165MM RIDE HEIGHT	OPTIONAL KITS <input type="checkbox"/> AXLE LIFT <input type="checkbox"/> RAISE LOWER <input type="checkbox"/> DUMP KIT <input type="checkbox"/> AIR GAUGE IF OTHER RIDE HEIGHT REQUIRED CONTACT FKH
---	--

Air Kits for Air Suspensions

(For Weweler Suspension add a **W** in front of the part number below)

overslung <input type="checkbox"/> ACK10 SINGLE NO TANK STD <input type="checkbox"/> ACK10T SINGLE C/W TANK <input type="checkbox"/> ACK20 TANDEM STD <input type="checkbox"/> ACK20T TANDEM C/W TANK <input type="checkbox"/> ACK30 TRI NO STD <input type="checkbox"/> ACK30T TRI C/W TANK	underslung <input type="checkbox"/> ACK1U SINGLE NO TANK STD <input type="checkbox"/> ACK1UT SINGLE C/W TANK <input type="checkbox"/> ACK2U TANDEM STD <input type="checkbox"/> ACK2UT TANDEM C/W TANK <input type="checkbox"/> ACK3U TRI NO STD <input type="checkbox"/> ACK3UT TRI C/W TANK	<input type="checkbox"/> ACK2AD 2 AXLE DOG STD <input type="checkbox"/> ACK2AD 2 AXLE DOG C/W TANK <input type="checkbox"/> ACK3AD 3 AXLE DOG STD <input type="checkbox"/> ACK3ADT 3 AXLE DOG C/W TANK <input type="checkbox"/> ACK4AD 4 AXLE DOG NO TANK <input type="checkbox"/> ACK4ADT 4 AXLE DOG C/W TANK <input type="checkbox"/> OTHER PLEASE SPECIFY
---	--	--

Brake Kits

<input type="checkbox"/> SINGLE AXLE TAG <input type="checkbox"/> TANDEM LEAD <input type="checkbox"/> TANDEM TAG <input type="checkbox"/> TRI LEAD <input type="checkbox"/> TRI TAG	<input type="checkbox"/> QUAD LEAD <input type="checkbox"/> QUAD TAG <input type="checkbox"/> TANDEM DOG <input type="checkbox"/> TRI DOG <input type="checkbox"/> QUAD DOG
--	---

Boosters

<input type="checkbox"/> 30/30 <input type="checkbox"/> 24/30 <input type="checkbox"/> 24/24 <input type="checkbox"/> 20/24 <input type="checkbox"/> OTHER: _____
