

# DISC BRAKE AXLE

12 MONTH WARRANTY



| MODEL          | BRAKE TYPE   | BEARING CONFIGURATION | HUB TYPE        | STUD SIZE | BEAM SIZE (mm) | TRACK (mm)  | CAPACITY (kg) |
|----------------|--------------|-----------------------|-----------------|-----------|----------------|-------------|---------------|
| KF26AG15L185ON | Wabco Pan 19 | Tapered               | 10 Stud 285 PCD | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26AG16L185ON | Wabco Pan 19 | Tapered               | 10 Stud 335 PCD | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26BG15L185ON | Wabco Pan 19 | Parallel              | 10 Stud 285 PCD | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26AG24L185ON | Wabco Pan 19 | Unitised              | 10 Stud 285 PCD | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26BG16L185ON | Wabco Pan 19 | Parallel              | 10 Stud 335 PCD | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26AG14J185ON | Wabco Pan 19 | Tapered               | 5 Spoke         | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26BG14J185ON | Wabco Pan 19 | Parallel              | 5 Spoke         | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26BG25L185ON | Wabco Pan 19 | Unitised              | 5 Spoke         | M22       | 127 x 16       | 1850 / 1820 | 11,500        |
| KF26AG19K185ON | Wabco Pan 19 | Tapered               | 8 Stud 275 PCD  | M22       | 127 x 16       | 1850 / 1820 | 11,500        |

Note: Oil Hub Optional

## FEATURES:

### BRAKES

Long life and low maintenance and weight friendly due to:


- Patented spreader plate design controls flat or even wear guaranteeing optimum use of asbestos free brake lining up to the wear limit, giving high temperature stability and low fade characteristics
- Lightweight caliper with proven highly efficient single piston design and fully encapsulated caliper guides with metal covers
- KTL coated to provide the best corrosion protection in our harsh conditions

### AXLES

- Forged one-piece heat-treated tubular designed beam gives great strength whilst reducing stress and enabling greater fatigue resistance
- Induction hardened and precision ground bearing and seal journals reduce premature spindle wear
- Industry standard Timken tapered bearings ensure compatibility and ready availability of replacement parts
- ADR approval number FB 30241

## K Hitch disc brake axle: durability & performance

The K Hitch **DISC BRAKE AXLE** combines proven one-piece heat-treated beam with Wabco Pan 19-1 brake technology to give the prime requisites for any disc braked axle. Developed specifically for use with 19.5" or 22.5" wheels using 8 x 275, 10 x 285 or 10 x 335 PCD hubs with wheel studs to suit steel or alloy wheels using the same standard ISO wheel nut.

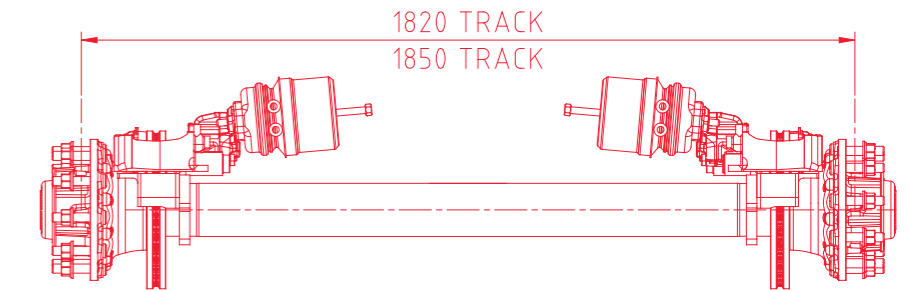

## FEATURES:

- Forged one-piece round axle beam
- 11.5 tonne capacity
- 16mm wall thickness
- Tapered, parallel or unitised bearing configuration
- Induction hardened bearing journals, 127mm round axle beam
- Wabco Pan 19 disc brake with 377mm diameter rotor
- Light tare weight assembly

