



FUWA K HITCH (Australia) Pty Ltd

ABN 54 078 731 209

Head Office

Melbourne

13-21 Bliss Court
Derrimut VIC 3030
Tel. 03 9369 0000
Fax. 03 9369 0100

Queensland

41 Moreton
Heathwood Qld 4110
Tel. 07 3372 2223
Fax. 07 3372 1022

Perth

77B Kurnall Road
Welshpool WA 6106
Tel. 08 9350 6470
Fax. 08 9350 6570


SALES SPEC SHEET

SPRING BRAKE CHAMBERS *DRUM*

The **FUWA K HITCH** distributed Spring Brake Chambers are sourced from one of the most experienced and reliable manufacturer of air brake systems and related components. With over 30 years experience and certified to ISO/TS 16949, we can rely on a solid and dependable product.



The Spring Brake Chambers are tested to the SAE J1469, SAE J11469, SAE J2318 standards and are registered at DOTARS.

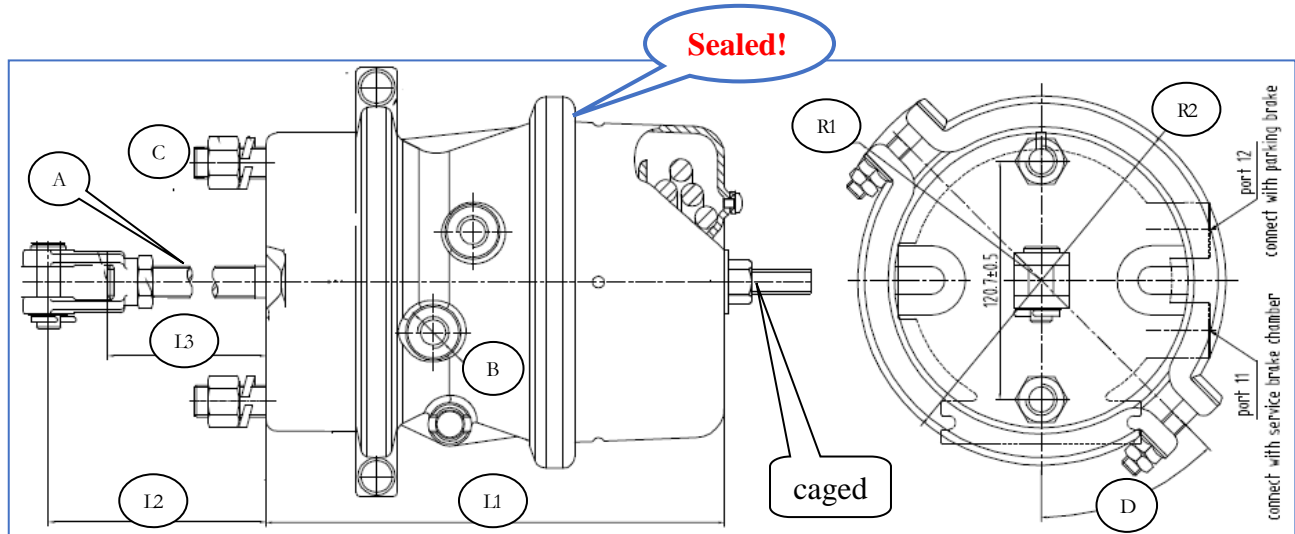

PART NUMBER	STROKE (mm)	R1 (mm)	R2 (Ø mm)	L1 (mm)	L2 (mm)	L3 (mm) caged	A PUSH ROD	B AIR INLET	C STUD	D ANGLE	WEIGHT (kg)
KHT2024EBR	64	115	190	245	285	255	5/8-18UNF	3/8-18NPT	5/8-UNC	45°	8.6
KHT2424EBR	64	115	190	245	285	255	5/8-18UNF	3/8-18NPT	5/8-UNC	45°	8.8
KHT2430EBR	64	128	210	235	285	255	5/8-18UNF	3/8-18NPT	5/8-UNC	45°	9.2
KHT3030EBR	64	128	210	243	285	255	5/8-18UNF	3/8-18NPT	5/8-UNC	45°	10.5

Note: For the extended length (uncaged) of the bush rod: STROKE + L3

Note: The dimensions in the table are nominal with tolerance applying. For more specific dimensions contact FKH.

Note: Prior to Aug 2018 the spring brake chamber was unsealed.